



Pro Series 3

The essential choice for interactive excellence

The Pro Series 3 is an EDLA-certified touchscreen display built for seamless collaboration and superior connectivity, engineered for efficiency and sustainability. It delivers 20% greater power savings than previous models and features ultra-responsive 50-point touch precision for smooth, accurate interaction.

Available in a range of sizes 65" 4K | 75" 4K | 86" 4K | 98" 4K

More features. Better performance. Less cost.

Designed for modern classrooms, it includes advanced digital whiteboarding, effortless wireless casting, and centralised device management software.



The Key Features



Google EDLA-Certified

Access your go-to apps, Google Drive, Docs, Sheets, Slides, Teams, Word, PowerPoint, and more, right from the screen via Google Play. Manage access and implement download restrictions to stay in control.



Reduce energy costs by 20%

Compared to previous generations. Sustainable design with ultra-low power standby mode - a win for your budget and the environment.



Any Screen, Any Time

With integrated NFC, users can simply swipe their fob, card, or device to load their personal profile on any Clevertouch anywhere in the world.



Software included at no extra cost



Your IT team can control, update, and troubleshoot a fleet of Clevertouch screens without being in the room, ensuring your users always have the latest versions of apps and software.

[Learn More](#)

LYNX Whiteboard is a free, dynamic app for building engaging sessions, whether for lessons or presentations. Designed for real-time collaboration, it offers the most intuitive user experience of any whiteboard, supporting interaction, creativity, and cloud access across environments.

[Learn More](#)

Download the Clevershare App to your phone, tablet or laptop, and connect instantly by typing in the code shown on the Clevertouch screen. The Clevershare App is free to download and compatible with Android, Windows, iOS, and Chrome devices.

[Learn More](#)

CleverLive is a cloud-based digital signage content management platform that connects all your Clevertouch products, enabling you to broadcast messages, announcements, and alerts. Use editable templates or create your own presentations.

[Learn More](#)

Features



SD Card Player for expandable storage up to 640GB



Anti-Glare Display reduces reflections and improves the viewing experience in brightly lit rooms or rooms with windows.



The most fluid, lag-free writing experience on a touchscreen with true 4K High Precision Technology.



Room-filling sound with 2x 25W speakers + 20W Subwoofer.



Sync with Google Drive, OneDrive, and Dropbox - work anywhere, anytime.



Add any USB camera for instant video calls, remote collaboration, or hybrid learning



Wireless or hardwired connections so team members and visitors can connect safely using separate networks.



Seamless integration with room booking system - Sync with your MS Exchange™ and Outlook 365 calendars.



Improve communication with instant messages and alerts using CleverLive digital signage.



Up-to seven-years comprehensive warranty



Instant Over-the-Air Updates (OTA) seamlessly delivered to your display.



Pro Series 3 Specifications

Display

| | |
|-------------------------------|--|
| Diagonal Size | 65" 4K 75" 4K 86" 4K 98" 4K |
| Screen Type | 65" VA - Direct LED Backlight 75" VA - Direct LED Backlight 86" IPS - Direct LED Backlight 98" ADS LCD - Direct LED Backlight |
| Aspect Ratio | 16:9 |
| Display Colours | 1.07 Billion (10 bit) |
| Resolution | 4K UHD (3840x2160 @60Hz) |
| Response Time | 6.5ms |
| Refresh Rate | 60Hz |
| LCD Viewing Angle | 178° |
| Brightness | 450 cd/m2 |
| Contrast Ratio | 65" 5000:1 75" 5500:1 86" 1200:1 98" 1200:1 |
| Dynamic Contrast Ratio | 65" 6000:1 75" 6000:1 86" 6000:1 98" 6000:1 |
| DC Dimming (for Flicker Free) | Yes |
| Glass Hardness | Tempered Glass - Mohs Level 7 |
| Glass Thickness | 65" 3.2mm 75" 3.2mm 86" 3.2mm 98" 4mm |
| Glass Type | Low Parallax 0mm Air Gap - Heat tempered - Anti Glare & Anti smudge for durability - Super Glide Surface |
| Main Board | RK3576 |
| Life of Screen | 50,000 hours minimum |
| NTSC | 72% |
| Anti-bacterial Power Button | Yes |

Interactivity

| | |
|-----------------------------|---|
| Writing Technology | High Precision IR Technology |
| Continuous Touch Points | 50 |
| Touch Resolution | 32768x32768px |
| Response Time | ≤2.5ms |
| Touch Accuracy | ±1mm |
| Minimum Object Size | 2mm |
| Touch Tool | Finger, passive pen, opaque objects |
| Simultaneous Writing | Yes |
| Ink In Tools | Yes - LYNX |
| Pens Included | 2 |
| Pen Type | Dual Recognition Stylus |
| Pen Holder | Integrated magnetic pen holders |
| Pen Tip Diameter | 3mm/7mm |
| Pen & Touch Differentiation | Yes |
| Pen Identities | 2 |
| Palm Rejection | Yes |
| Annotation Over Any Source | Yes |
| Classroom Essential Apps | Includes Whiteboard, Annotate, Timer, Media Players, Browser, PDF Reader, Screen Record, Spinner, Voting, Maths Tools |
| Compatibility | Windows 10, Linux, Mac, Android, Chrome |
| Tracking Rate | ≥1m/s |
| Scan Rate | 400Hz |
| Gestures & Edge Swipes | Windows Supported, OSX With additional Driver |

Connectivity

| | |
|--|--|
| OPS Slot | 1 - Intel Spec 80Pin |
| HDMI In | 3 (2.1) |
| HDMI OUT (Clone content from one display to another) | 1 |
| USB-A 2.0 | 1 (1 USB for system upgrade) |
| USB Touch (type B) | 2 (3.2) |
| USB A 3.2 (faster data transfer) | 2 x Front USB Type A 3.2 with faster data transfer 2 x Side USB Type A 3.2 with faster data transfer |
| USB C (Video, Audio & Touch) | 1 x Front USB Type C with video, audio, touch, network & 65W charging 1 x Side USB Type C with video, audio, touch & network. |
| LAN In (RJ45) | 1 |
| LAN Out (RJ45) | 1 |
| RS-232 | 1 |
| Wake-on-Lan | Yes |
| Wireless | Yes |
| Clevertouch WiFi Module | Yes |
| Bluetooth | Yes 5.2 |
| DisplayPort | 1 |
| VGA In | 1 |
| Audio In | 1 |
| Optical Out | 1 |
| Headphone | 1 (3.5mm) |
| Total touch out ports | 2 (3.2) |
| NFC Reader / Writer | Yes - integrated |
| Camera | Optional Extra |
| Proximity Sensor | No |
| Array Mic | 8 Array Microphone |
| Sound pickup Angle | 180° |
| Sound pickup distance | 8m |
| Frequency Domain | 32kHz |
| WiFi | IEEE 802.11a/b/g/n/ac/ax with 2 × 2 MIMO (hotspot only) (both 2.4 and 5 GHz bands) |
| WiFi Generation | WiFi 6E |
| WiFi Speed | Capable of speeds up to 1Gbps |

Audio

| | |
|---|---------------------------------|
| Dual Front Facing, Bass Enhanced Speakers | 2x 25W speakers + 20W Subwoofer |
| Audio Out | Yes |
| SPDIF / Fibre | Yes |
| Sound Channel | 2.1 |
| Line Array Microphone | Yes |
| Super Wide Sound | Yes |

Pro Series 3 Specifications

Power

| | |
|-----------------------------|--|
| Power Requirements | 65" 100-240V~ 50/60Hz 4.0A 75" 100-240V~ 50/60Hz 4.0A 86" 100-240V~ 50/60Hz 5.0A 98" 100-240V~ 50/60Hz 5.0A |
| Power Consumption (Normal) | 65" 73.88W 75" 72.86W 86" 91.89W 98" 136.73W |
| Power Consumption (Standby) | < 0.5W |
| Ultra Quiet Fanless Design | Yes |

Computing

| | |
|--|--|
| Operating System | Android 14 |
| System Version | LUX 14 |
| Google Certification | EDLA Certified (Enterprise Device Licence Agreement) |
| Access to Google Play Store Apps, Microsoft Apps & Google Cloud Services | Yes (Certified) |
| Access to Video Conferencing Apps (MS Teams, Google Meet, Zoom etc) | Yes |
| RAM | 16GB |
| Internal Storage | 128GB |
| Expandable Storage | 640GB |
| Total Storage | 640GB (Expandable) |
| CPU | Quad Core A72 + Quad Core A53 |
| GPU | Mali G52 MC3 |
| Android Resolution | 4K |
| System Architecture | 64-bit |
| Integrated LUX UI | Yes |

Physical Spec

| | |
|-------------------|---|
| Panel Dimensions | 65" 1488×908×86mm/58.58×35.75×3.38 inch 75" 1863×225×1155mm/73.35×8.86×45.47 inch 86" 1957×1171×97mm/77.05×46.10×3.82 inch 98" 2219.6×1318.4×89mm/87.40×51.89×3.50 inch |
| Packed Dimensions | 65" 1628×185×1014mm/64.09×7.28×39.92 inch 75" 1863×225×1155mm/73.35×8.86×45.47 inch 86" 2110×225×1304mm/83.07×8.86×51.34 inch 98" 2406×280×1485mm/94.72×11.02×58.46 inch |
| Net Weight | 65" 35.05kg/77.25lb 75" 46.75kg/103.18lb 86" 55.00kg/121.25lb 98" 84.35kg/186.00lb |
| Gross Weight | 65" 41.85kg/92.33lb 75" 56.55kg/124.77lb 86" 70.15kg/154.78lb 98" 108.48kg/239.00lb |
| VESA Mount Point | 65" 600×400mm/23.62×15.75 inch 75" 800×400mm/31.50×15.75 inch 86" 800×600mm/31.50×23.62 inch 98" 800×600mm/31.50×23.62 inch |
| Screws for VESA | M8 x 25mm |

Operating & Storage Environment

| | |
|-----------------------|-------------------|
| Operating Temperature | 0° to 40° |
| Storage Temperature | -20° to 60° |
| Operating Humidity | 10% to 90% RH |
| Storage Humidity | 10% to 90% RH |
| Altitude | Below 5000 metres |

Software & Features

| | |
|---|--|
| BYOM | Yes |
| LYNX™ App With Online Lesson Planning | Yes |
| Handwriting Recognition | Yes - LYNX Pro |
| Unlimited Multi-Floating Resizable Windows | Yes |
| Split Screen Support | Yes |
| Ecosystem of Extensive Apps with Secure and Fast Download | Yes |
| OpenSDK Support | Yes |
| Intelligent O&M | Yes |
| H.264 + H.265 | Yes |
| HD Hardware Encoding and Decoding | Yes |
| CleverLive™ Embedded Digital Signage | Yes |
| Clevershare™ Mirroring Any Device To The Board | Free for the life of the screen (touch back) |
| Miracast (WiFi Direct) | Yes |
| AirPlay | Yes |
| Chromecast | Yes |
| Account Profiles | Yes |
| Cloud Account Access | OneDrive, Google Drive, LYNX Cloud |
| CleverLive Rooms™ Embedded Room Booking | Yes |
| Customisable Welcome Page with option to integrate logo, clocks apps and more (CleverLauncher™) | Yes |
| LynxCloud™ | Yes |
| Whiteboard Annotation | Yes |
| Scan QR Code For Saving Work | Yes |
| Alerts and Announcements | Yes |
| Over-the-Air Updates | Yes |
| Remote Management Of Touchscreens (MDM) | Yes - One year license |

Inside your Clevertouch Box

| | |
|-------------------|---|
| What's In The Box | (1) Clevertouch Pro Series 3 (65" 4K 75" 4K 86" 4K 98" 4K) (1) 3M Length HDMI Cable (1) 3M Length USB cable (A-B) (1) 1.5M USBC Cable (1) 3M Regional Power Cable (1) Remote Control (2) Batteries for Remote Control (2) Dual Recognition Stylus (1) User Guide (1) Quick Install Guide (1) Clevertouch WiFi Module |
|-------------------|---|

Warranty

Warranty term and upgrade options vary by region. Contact your local reseller or distributor for information and visit clevertouch.com/about/warranty

Pro Series 3 Specifications


Compliance & Certification

Regulatory Certification CE, FCC, UL, Energy Star & EEC




Our commitment to the Environment, Quality and Security


Cyber Essentials and BSI ISO9001, ISO14001, ISO27001 Certifications.





Pro Series 3 Technical Drawings

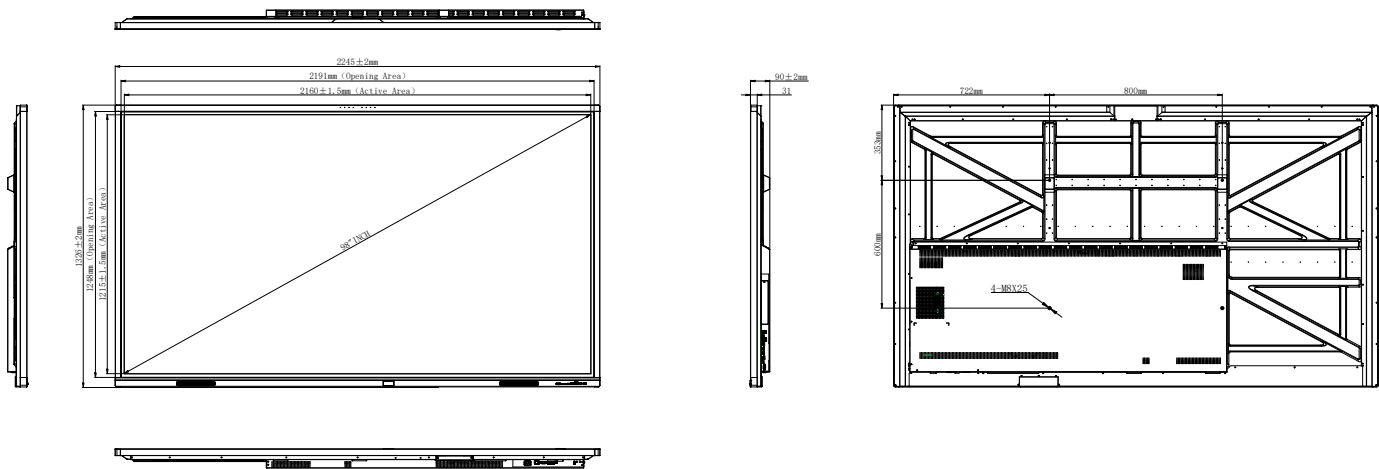

98"

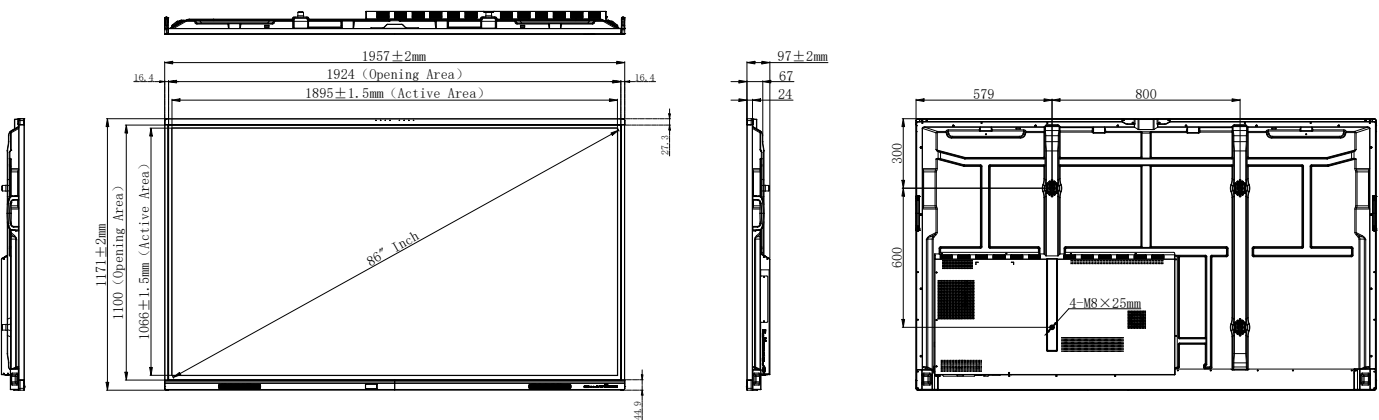

86"

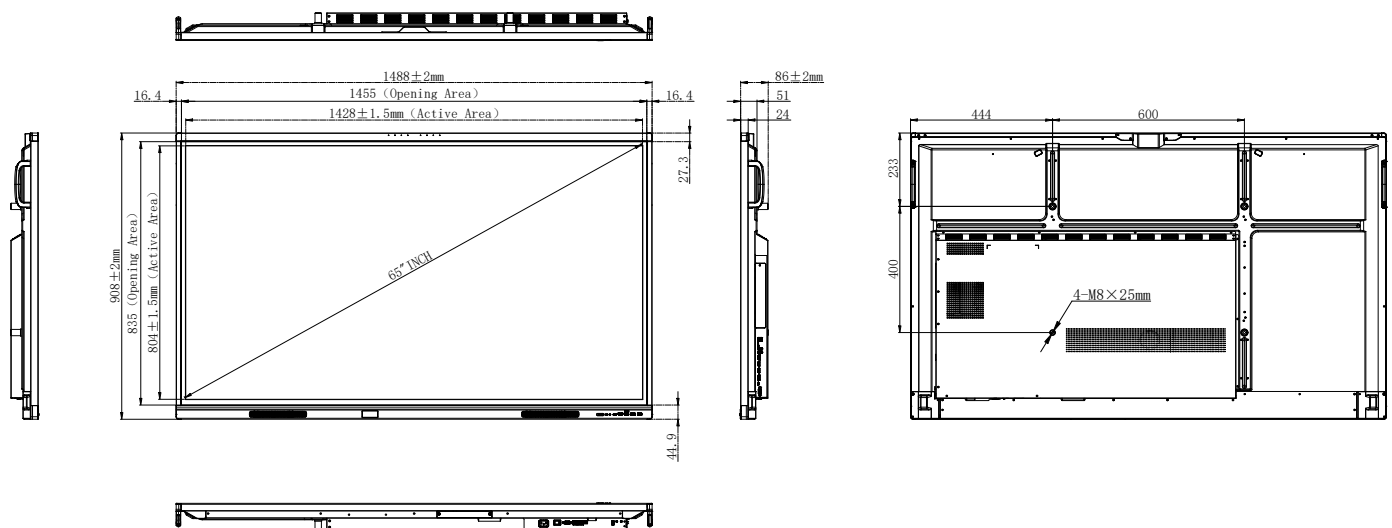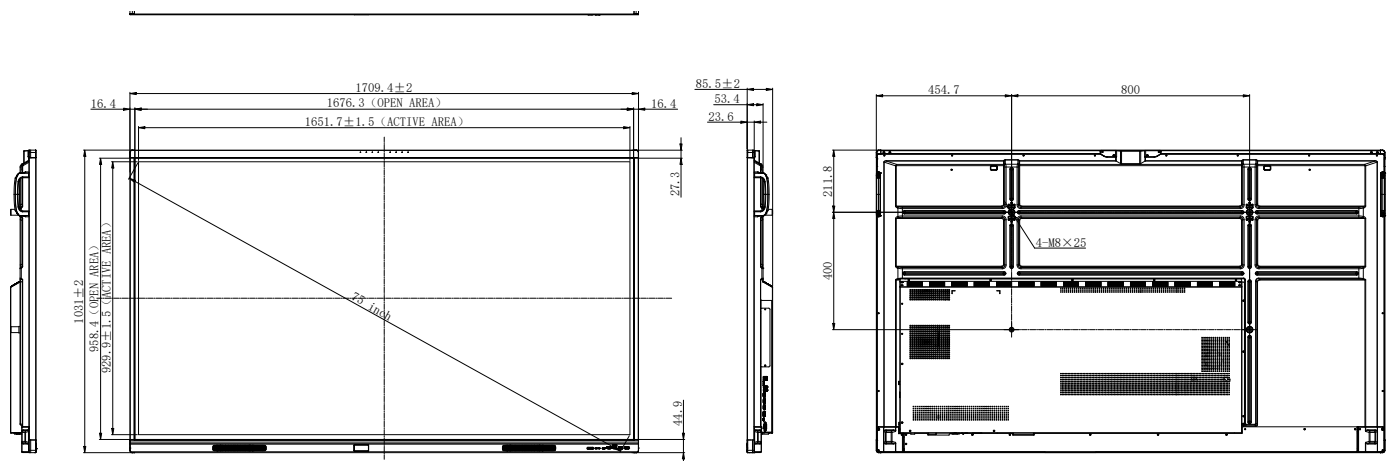

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may be subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.